



ISM-BLQ1 Blue Line Quad PIR Detector



- ▶ **11 m x 11 m (35 ft x 35 ft) broad coverage**
- ▶ **EN50131-2-2 Grade 2 compliant**
- ▶ **Dual sensor, quad element design (two separate pyroelectric elements)**
- ▶ **Flexible mounting height from 2.3 m to 2.7 m (7.5 ft to 9 ft)**
- ▶ **No range or height adjustments required**
- ▶ **Installation-friendly two-piece design**
- ▶ **Easy wiring access with plug-in terminals**
- ▶ **Eight detection layers including optional look-down zone**
- ▶ **Draft and insect immunity**
- ▶ **Cover tamper**

The ISM-BLQ1 Quad PIR Detector uses two individual sensors that operate like two PIRs in one. Each sensor processes signals separately. Both must activate to cause an alarm. This increases reliability, because false alarm sources such as noise spikes and small animals are ignored.

Quad detectors combine an unsurpassed level of catch performance with the highest level of false alarm immunity. Therefore, they are particularly well suited for challenging installation situations; for example, cases where cross catch of intruders cannot be guaranteed or where intruders are able to cross the detection pattern very quickly.

Functions

First Step Processing (FSP)

First Step Processing (FSP) almost instantly responds to human targets without producing false alarms from other sources. FSP adjusts the detector's sensitivity based on signal amplitude, polarity, slope, and timing. This eliminates the need for the installer to select the sensitivity level. Each of the two PIR sensors processes signals individually, and both sensors must agree there is an alarm before the alarm relay activates.

Test Features

Externally visible alarm LED can be disabled after installation.

Tamper

The switch opens when the cover is removed.


Draft and Insect Immunity

The sealed optical chamber prevents drafts and insects from affecting the detector.

Certifications and Approvals

Region	Certification	
Europe	CE	2004/108/EC EMC Directive (standards: EN55022:2006; EN50130-4:1996 +A1:1998 +A2:2003; EN60950-1:2006)
	EN50131	EN50131-1, TS 50131-2-2 August 2004, EN 50130-4, EN 50130-5
Belgium	INCERT	B-509-0009/b

Region	Certification
Russia	GOST IEC 60839-1-3-2001, IEC 60839-2-2-2001, IEC 60839-2-6-2001, GOST 26342-84, GOST 27990-88 GOST 12997-84, GOST R 50009-2000, GOST R 51317.3.2-99, GOST R 51317.3.3-99, GOST R MEK 60065-2002
USA	UL ANSR: Intrusion Detection Units (UL639), ANSR7: Intrusion Detection Units Certified for Canada (cULus)
Italy	IMQ
France	AFNOR NF, A2P (262264-00)
Sweden	INTYG Nr05-133; SBSC larmklass 3, miljöklass 2
Australia	C-tick
Ukraine	IEC 60839-1-3-2001, IEC 60839-2-2-2001, IEC 60839-2-6-2001, GOST 26342-84, GOST 27990-88
Europe	Complies with EN50131-2-2 Grade 2

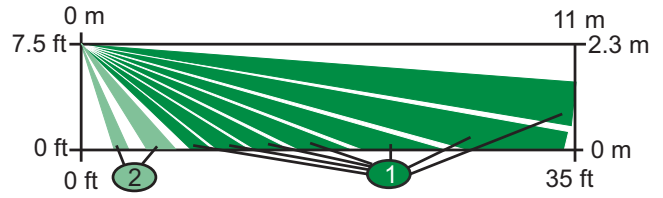

Side View Broad: 11 m x 11 m (35 ft x 35 ft)

1 PIR coverage patterns (1 and 2) 2 Two look-down zones

Mounting

The recommended mounting height is 2.3 m to 2.7 m (7.5 ft to 9 ft).

The detector can be mounted:

- On a flat wall (surface, semi-flush), with the optional B335 Swivel-mount Bracket, or with the optional B328 Gimbal-mount Bracket.
- In a corner (the junction of two perpendicular walls).
- On the ceiling with the optional B338 Ceiling-mount Bracket.

Note The use of optional mounting brackets can reduce the detector's range and increase the dead zone areas.

Power Considerations

Power Limits


Input power must be provided by an approved limited power source. All outputs must be connected to SELV (safety extra-low voltage) circuits only.

Standby Power

This detector has no internal standby battery. *For UL Listed product installations, 4 hr (40 mAh) of standby power must be supplied by the control unit or by a UL Listed burglary power supply.*

Installation/Configuration Notes

Coverage Patterns

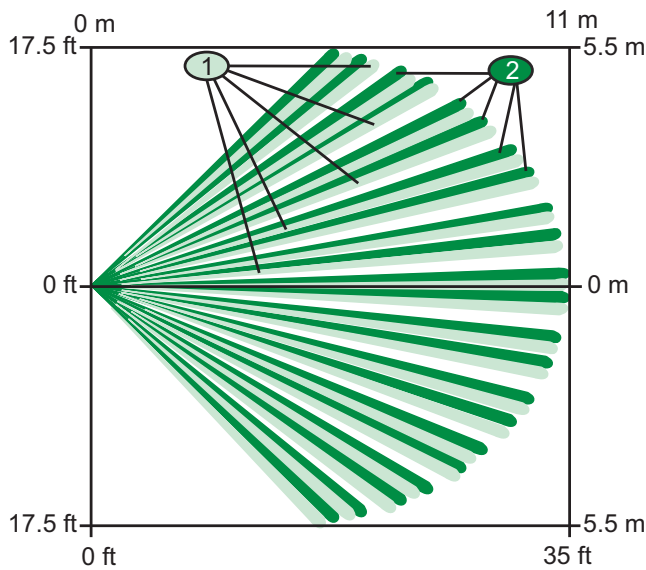

Top View Broad: 11 m x 11 m (35 ft x 35 ft)

1 PIR pattern 1 2 PIR pattern 2

Parts Included

Quant.	Component
1	Detector
1	Hardware pack
1	Literature pack

Technical Specifications

Environmental Considerations

Complies with EN50131-2-2 Environmental Class II, Security Grade 2

Relative Humidity: 0 to 85%, non-condensing

Temperature (operating): -29°C to +49°C (-20°F to +120°F)
For UL Listed product installations, 0°C to +49°C (+32°F to +120°F)

Mechanical Properties

Color:	white
Dimensions:	13.2 cm x 6.1 cm x 4.8 cm (5.2 in. x 2.4 in. x 1.9 in.)
Material:	High-impact ABS plastic
Radio Frequency Interference (RFI) Immunity	No alarm or setup on critical frequencies in the range from 26 MHz to 2 GHz at field strengths less than 30 V/m.

Outputs

Digital Alarm:	5 V normally, grounded for 4 sec during alarm.
Relay:	Solid state, supervised, Form A normally-closed (NC) contacts rated for 125 mA, 28 VDC, 3 W.
Tamper:	Normally-closed (NC) contacts (with cover on) rated at 28 VDC, 125 mA maximum. Connect tamper circuit to 24-hour protection circuit.

Power Requirements

Current (alarm):	18 mA
Current (standby):	10 mA maximum at 12 VDC
Voltage (operating):	10 VDC to 14 VDC

Ordering Information

ISM-BLQ1 Blue Line Quad PIR Detector Uses two individual sensors that operate like two PIRs in one	ISM-BLQ1
Accessories	
ISM-BLA1-CC Blue Line Color Camera Module (NTSC format) NTSC format	ISM-BLA1-CC-N
ISM-BLA1-CC Blue Line Color Camera Module (PAL format) PAL format	ISM-BLA1-CC-P
ISM-BLA1-LM Blue Line Nightlight Module Fits all Blue Line detectors	ISM-BLA1-LM
ISM-BLA1-SM Blue Line Sounder Module Fits all Blue Line detectors	ISM-BLA1-SM
B328 Gimbal-mount Bracket Mounts on a single-gang box and allows rotation of a detector. Wires are hidden inside.	B328
Swiveling B335-3 low-profile mount Swiveling, low-profile, plastic mount for wall mounting. The vertical swivel range is +10° to -20°, while the horizontal swivel range is ±25°. Available in triple packs.	B335-3
B338 Universal Ceiling-mount Bracket Swiveling plastic mount for ceiling mounting. The vertical swivel range is +7° to -16°, while the horizontal swivel range is ±45°.	B338



Unit 22, 670 Gympie Rd Lawnton
www.technorx.com.au
 Ph: 07 3881 2060

4 | ISM-BLQ1 Blue Line Quad PIR Detector