

Hills Home Hub[®]


HTM-408S & HTM-408 TELEPHONE MODULE

Description:

The Hills Home Hub Telephone[®] Distribution Module provide telephone distribution services throughout the home or office. This module supports the bridged distribution of any combination of up to four telephone lines to eight locations. In addition, the Mode-3 socket provides line seizure capability to the DAS Security System.

Installation: (see Fig. 1)

To install the module, simply insert tabs to the cap located on the rail of the enclosure. Press the fastener to lock the module at the desired position.

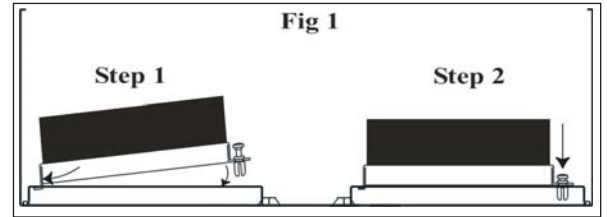


Operation:

The Hills Home Hub[®] Telephone Module has a 110/IDC punch-down connector labelled "LINES IN" to support four incoming phone lines from The telephone company and distribute them up to eight rooms. Punch down the twisted pairs to each line that is required at each room.

Example: Each 110/IDC connector represents one Room, if you want to activate line #1 at Room #1, simply punch down the twisted pair (Blue/White Blue) to the first IDC/110 connector. If you want to use a 2-line phone (Line#1 & Line#2) at Room #1, simply punch down twisted pairs (Blue/White Blue & Orange/White Orange) to the first 110/IDC connector to support a 2-line phone. Follow the same procedure for each subsequent Room.

Note - Connect only one twisted pair of Cat5/Cat5e cable to each 110/IDC connector. (see Fig. 2)

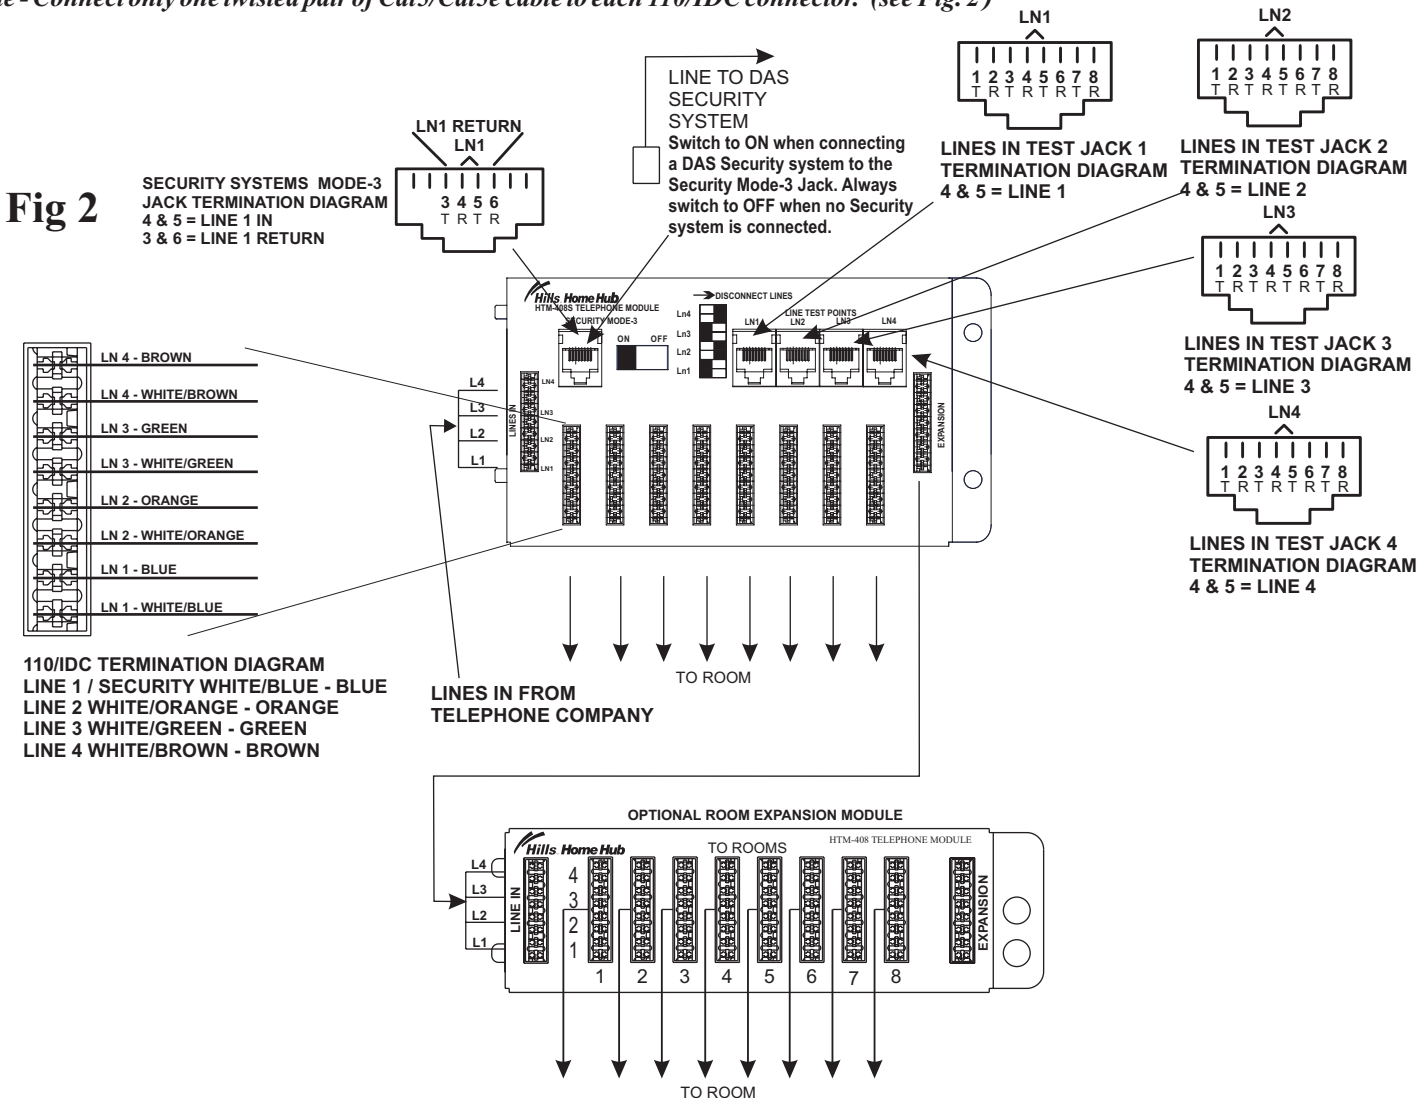

Telephone Expansion:

There is a 110/IDC connector labelled "EXPANSION" which is used link another telephone distribution modules to support additional rooms.(see Fig 2)

Wire installation:

For 110/IDC connector termination follow the wire colour-code and only use the 110 punch-down tool to push the wire between the contact blades . For RJ-45 plug termination, follow the TIA T568A standard for wiring instruction . (see Fig 2)

Contact Details.



DIRECT ALARM SUPPLIES

Head Office

10-12 Wiggs Rd
Riverwood NSW 2210
Ph: (02) 9717 5222
Fax: (02) 9717 5221
Service: 1800 252 213

A  **Hills** Company

12 Wentworth St
Granville NSW 2142
Ph: (02) 9897 7722
Fax: (02) 9897 9477

Unit 27/17 Bowden St
Alexandria NSW 2015
Ph: (02) 9698 9698
Fax: (02) 9319 1379

23/376-380 Eastern Valley Way
Chatswood NSW 2067
Ph: (02) 8467 1467
Fax: (02) 8467 1499

Unit 1/43-45 Collie St
Fyshwick ACT 2609
Ph: (02) 6280 9630
Fax: (02) 6280 9632

1/16 Viewtech Pl
Rowville VIC 3178
Ph: (03) 9755 6922
Fax: (03) 9755 7311

Factory 5/51 Moreland Rd
Coburg VIC 3058
Ph: (03) 9383 2066
Fax: (03) 9383 2173

4/276 Abbotsford Rd
Bowen Hills QLD 4006
Ph: (07) 3252 5512
Fax: (07) 3252 5531

7/179-181 Currumburra Rd
Ashmore QLD 4214
Ph: (07) 5597 7203
Fax: (07) 5597 3900

5 Toucan Cres
Condon QLD 4815
Ph: (07) 4755 1270
Fax: (07) 4755 1271

24 Raglan Ave
Edwardstown SA 5039
Ph: (08) 8375 9900
Fax: (08) 8375 9999

Unit 1/1 Natalie Way
Balcatta WA 6021
Ph: (08) 9240 4420
Fax: (08) 9240 4313

219B Murray St
Hobart TAS 7000
Ph: (03) 6234 9455
Fax: (03) 6234 9962



1/30 Greenpark Rd
Penrose Auckland
Ph: (09) 525 8007
Fax: (09) 525 8009

Unit A1A
5 Douglas Alexander Pde
Nth Harbour Industrial Estate
Albany Auckland
Ph: (09) 525 8007
Fax: (09) 415 7421

Unit 5/235 Waltham Rd
Sydenham Christchurch
Ph: (03) 374 6277
Fax: (03) 374 6287

1B Downer St
Lower Hutt Wellington
Ph: (04) 939 9355
Fax: (04) 939 9366



Head Office
12 Wiggs Road
Riverwood, NSW 2210
(02) 9717-5290
(02) 9717-5226

Cnr Cambria & Bridge
Keysborough, VIC 3173
(03) 9238-2533
(03) 9238 2535

448 Victoria Road
Malaga, WA 6090
(08) 9442-5633
(08) 9442-5644

114 Harris Road
East Tamaki Auckland
(9) 274-6509
(9) 274-1063

69 Activity Street
Acacia Ridge, QLD 4110
(07) 3344-3855
(07) 3344-4866

20 Raglan Avenue
Edwardstown, SA 5039
(08) 8371-0277
(08) 8371-1519

7 Ackland Street
Edwardstown, SA 5039
(8) 8371-3663
(8) 8371-1519